

NEW




Features

- Microcontroller based
- Memory function
- AC/DC 48-240V universal voltage
- 1NO output- 16A
- WiFi and bluetooth connection available
- 1 Module Din-rail mounting

Technical data

Models	RS-WIFI 1	RS-WIFI 2
Supply terminals	A1 ,A2	
Pulse terminal	S	
Supply voltage	AC/DC 24-240V	
Rated frequency	50/60Hz	
Supply indication	green LED	
Output indication	red LED	
Output contacts	1 NO	
Current rating	16A/AC1	
Astronomical function	No	Yes
Insulation voltage	250V	
Protection degree	IP20	
Pollution degree	3	
Electrical life	10 ⁵	
Mechanical life	10 ⁶	
Altitude	≤2000m	
Ambient temperature	-5 °C~+40 °C	
Storage temperature	-10 °C~+50 °C	
Wire size	0.5mm ² ~1mm ²	
Torque	0.5Nm	
Mounting	TH-35 DIN-Rail	

Front-face panel

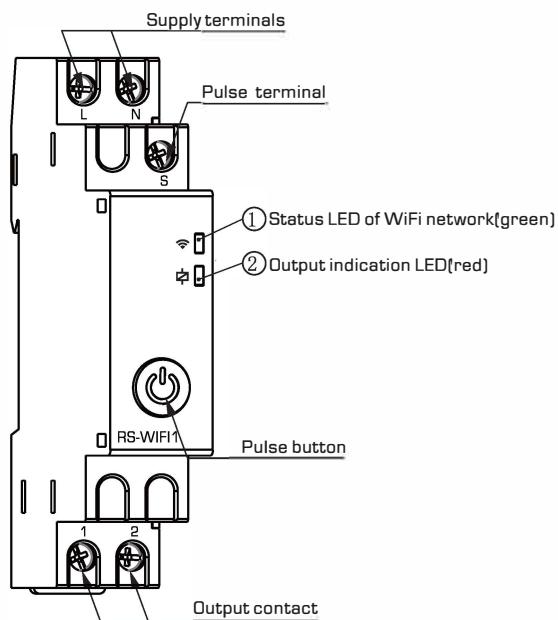

Wiring diagram

